


# i9100 Smart POS Payment Terminal

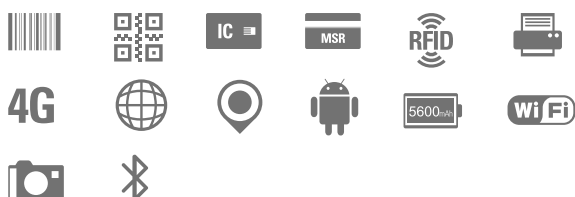

## Enterprise Security

Safedroid OS(based on Android 6.0/8.1)  
PCI 5.0 certified  
EMV L1/L2 certified  
EMV contactless

## Make It All Better

Accept all types of payments : Debit Card, Credit Card, Apple Pay, ALI Pay, 2D bar code payment, Cash

## Transform Your Business, Go Digital

Get online orders from customers in your area. Create and send offers and coupons to customers.



## Print Any Time, Print Anywhere

Supports 1D/2D bar code printing & receipt printing

## Highly Optimized Power System

3.75V, 5600mAh battery ensures long operation hours, The premium high-grade capacity cells provide long battery life cycle, reducing battery costs.

# i9100 Smart POS Payment Terminal

## Basic Characteristics

O.S.	Android 6.0 / 8.1 supports multi-language
CPU	Quad-Core 1.1GHz
Display	5.0 inch TFT-LCD HD, 720 x 1280 5.5 inch 720 x 1280(optional)
Panel	Ultra sensitive capacitive touch screen
RAM	1GB
ROM	8GB
Dimensions	188mm x 81 mm x 35mm (max 61mm)
Weight	470g (Battery included)
Buttons	Home button, Menu button, Back button The volume +/- button, Power button
Input	Chinese / English, and supports handwriting and soft keyboard
Barcode Scanner	Supports 1D/2D barcode scanning

## Radio Communication

Wi-Fi	IEEE 802.11 b/g/n
Bluetooth	Bluetooth 4.1 BLE
Chinese version	4G FDD-LTE (B1/B3) TDD-LTE (B38/B39/B40/B41)
	3G WCDMA(B1/B5/B8) TD-SCDMA(B34/B39)
	2G GSM/EDGE/GPRS (850/900/1800)
International version	4G FDD-LTE (B1/B2/B3/B4/B5/B7/B8/B20) TDD-LTE (B40)
	3G WCDMA(B1/B2/B5/B8)
	2G GSM/EDGE/GPRS (850/900/1800/ 1900MHz)

## Power

Main Battery	Rechargeable 3.75V, 5600mAh lithium polymer battery pack (Typical Operation time ≥8 hours)
RTC Battery	Real time clock battery

## Payment

Magcard	Supports ISO7811/7812/7813, and supports triple track (tracks 1&2&3), bi-directional
Chip Card	Supports ISO7816 standard
Contactless Card	Supports 14443A&14443B, MifareCard, Sony Felica, NFC 13.56MHz
Thermal Printer	Media type: Receipt paper Media roll size: 40mm Media width: 58mm printing paper, Resolution: 203dpi / 8dot / mm Print speed: 50~70mm/s Supports 1D/2D bar code printing
Certification	PCI PTS 5.0,PBOC3.0 Level 1&2, EMV4.3 Level1&2 ,EMV contactless PCI PTS 5.x etc.

## Expansion and Peripherals

Camera	5MP FF rear camera 2MP front-facing camera(optional)
GPS	GPS, Supports A-GPS, GLONASS, BD system
Slot	Micro SD/TF x 1(a maximum of 128 GB), SIM x 1, SAM x 2 or (SIM x 2, SAM x 1(optional))
PSAM	Conforms to ISO7816 standard
Interfaces	Micro USB x 1
Audio Frequency	Speaker, Buzzer

## Accessories

Standard	Power adaptor, USB cable, One battery.
Optional	Carrying Pouch, Media roll.

## User Environment

Operating Temperature	-10℃ ~ 50℃ (14~122℉ )
Storage Temperature	-40℃ ~ 70℃ (-40~158℉ )
Humidity	5% ~ 95% (non condensing)



i9100 Accessories Brochure

# All Accessories



Power Adapter



USB Cable



Battery



## Standard Accessories

### Power Adapter

- Applicable for charging device with country specific plugs.
- Input: 100–240V–50/60Hz 0.4A
- Output: 5V/1.5A



### USB Cable

- Applicable for charging and data transmission
- Interface: Micro-USB



## Battery



- Polymer Li-ion Battery
- Model: HBL9100
- 3.7V 5600mAh 20.72Wh
- Hours of Operation: More than 10 hours.
- Charging time: Less than 5 hours.